


## MEDIA RSC CARBON

# RSC CARBON

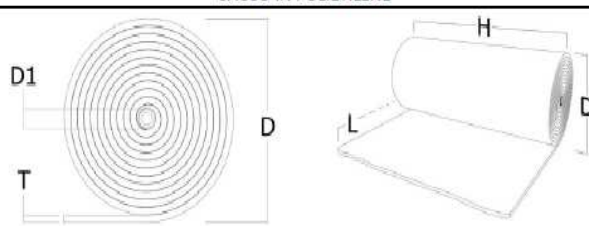

COMPOSIZIONE		FIBRA 100% POLIESTERE	
TEMPERATURA MASSIMA DI ESERCIZIO		150°C	
IMBALLO		SACCO IN POLIETILENE	
LEGENDA DIMENSIONI			

CODICE	%	Carb.attivo SUP.AREA(m2/m2)	Peso (g/m2)	T (mm)	Reaz.Fuoco EN 60335-2-31	DIN 53438-3	Permeabilità dell'aria (l/m2/s)
RSC150-5	24	40000	150	5,5	FH2		1050 (25 Pa)
RSC220-3	41	100000	220	3,0	FH2		1250 (50 Pa)
RSC220-5	35	85000	220	5,5	FH2		1500 (50 Pa)
RSC220-10	32	77000	220	10,0	FH2		1500 (50 Pa)
RSC360-18	31	120000	360	18,0	FH2		1400 (50 Pa)
RSC400-11	38	170000	400	11,0	FH2		1500 (50 Pa)
RSC450-8	44	220000	450	8,0			1000 (50 Pa)
RSC650-12	38	270000	650	12,0	FH2		1000 (50 Pa)
RSC360-8	23	86000	360	8,0	FH2		950 (50 Pa)

Dimensioni o versioni diverse sono fornibili a richiesta